

LDE / LEW data sheet

The electric torque wrench 90 - 13,000 Nm




Robust. Intelligent.


- » High torque at low device weight, torque accuracy better than 3%
- » Visual, acoustic operation via digital display
- » Available in different transmission versions, thus adaptable to every screwdriving
- » Automatic shut-off when reaching the torque with relaxation of the reaction arm

Technical data

Type	Nm min ^{*1} /max ^{*2}	lbf-ft min ^{*1} /max ^{*2}	~ U/min	■	Ø D mm	H mm	⚖ kg ^{*3}
LDE - 05	90 - 500	70 - 370	44	3/4"	80	405	4.5
LDE - 075	100 - 750	80 - 550	22	3/4"	80	439	5.0
LDE - 15	250 - 1500	180 - 1110	20	1"	88	455	6.1
LDE - 28	500 - 2800	370 - 2050	6	1"	88	495	7.3
LDE - 40	750 - 4000	550 - 2950	5	1"	88	495	7.3
LDE - 60	700 - 6000	520 - 4400	3.5	1 1/2"	102	515	9.2
LDE - 70	900 - 7500	660 - 5500	3	1 1/2"	128	531	12.1
LDE - 90	1100 - 9000	810 - 6600	2.5	1 1/2"	142	542	14.0
LDE - 120	1800 - 13000	1330 - 9500	2	1 1/2"	174.5	560	20.0
LEW - 05	90 - 500	70 - 370	44	3/4"	80	187	5.8
LEW - 075	100 - 750	80 - 550	22	3/4"	80	220	6.4
LEW - 15	250 - 1500	180 - 1110	20	1"	88	236	7.3
LEW - 28	500 - 2800	370 - 2050	6	1"	88	276	8.6
LEW - 40	750 - 4000	550 - 2950	5	1"	88	276	8.6
LEW - 60	700 - 6000	520 - 4400	3.5	1 1/2"	102	296	10.7
LEW - 70	900 - 7500	660 - 5500	3	1 1/2"	128	311	12.9
LEW - 95	1100 - 9500	810 - 7000	2.5	1 1/2"	142	323	14.6
LEW - 120	1800 - 13000	1330 - 9500	2	1 1/2"	174.5	340	20.6

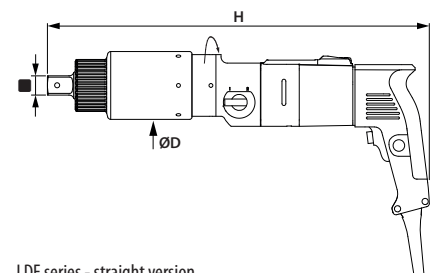

LDE series - straight version

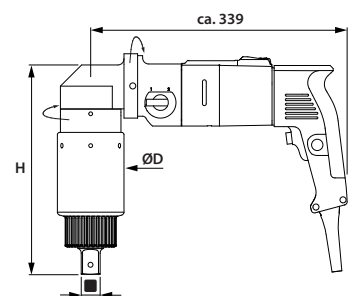

LEW series - angled version

^{*1} Lowest torque in 2nd gear

^{*2} Maximum torque in 1st gear

^{*3} Without reaction arm

All rights reserved.

Subject to modifications without prior notice.