

LKS data sheet

The counter wrench, ring wrench inserts 32-115 mm




Frequently copied. Never matched.

- » Equipped with the appropriate insert, the device utilises a thrust bearing and absorbs the driving torque with the integrated mechanics.
- » Following completion of the bolting operation, a simple press of the lever and the counter-wrench can be rapidly and easily released.
- » The patented mechanism of the GEDORE counter wrench is unique. Only the precise interplay of the individual components ensures correct and problem-free function. Cheaper copies can bend or stick under large loads. The ring inserts are made of forged chrome-vanadium steel.

Technical data

Type	L ₁ mm	B ₁ mm	H ₁ mm	L ₂ mm	B ₂ mm	H ₂ mm	kg
LKS	310	27	65/95	190	38	30	2.6 / 0.4 ^{*1}

^{*1}plus reaction element

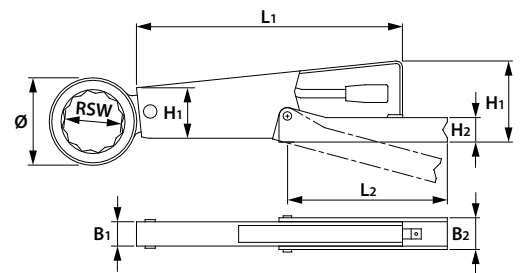

Ring wrench inserts type RSW

RSW mm	Ø ^{*1} mm	RSW mm	Ø ^{*1} mm	RSW mm	Ø ^{*1} mm	RSW mm	Ø ^{*1} mm
32	54	55	88	80	126	105	172
36	54	60	94	85	130	110	172
41	60	65	104	90	152	115	172
46	75	70	110	95	152		
50	80	75	115	100	155		

^{*1}Head diameter (Ø similar DIN 7444).

All rights reserved. Subject to modifications without prior notice.